

FIG. 1

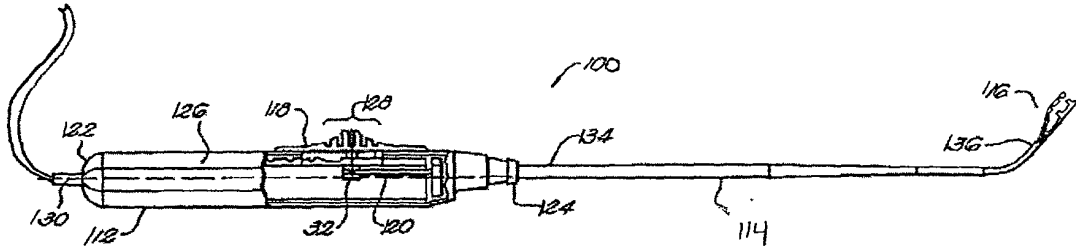


FIG. 2

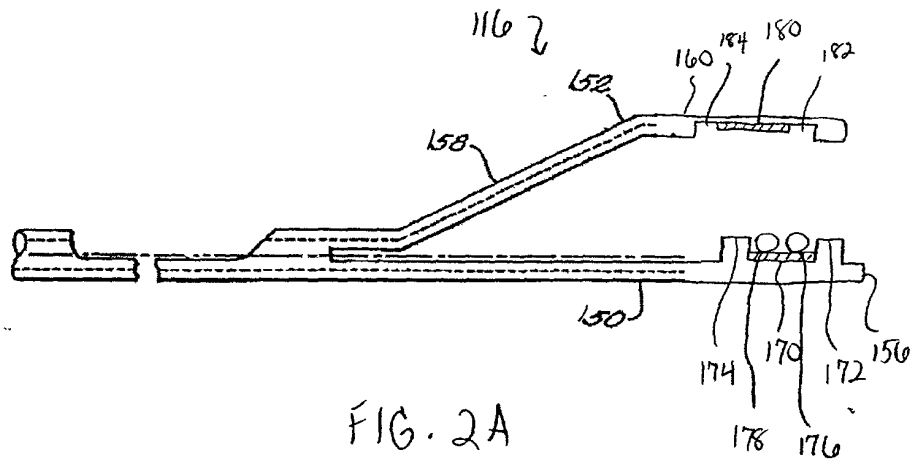
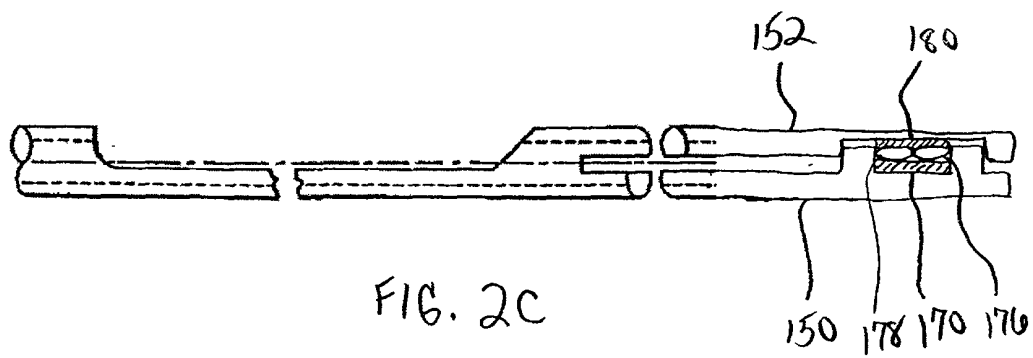
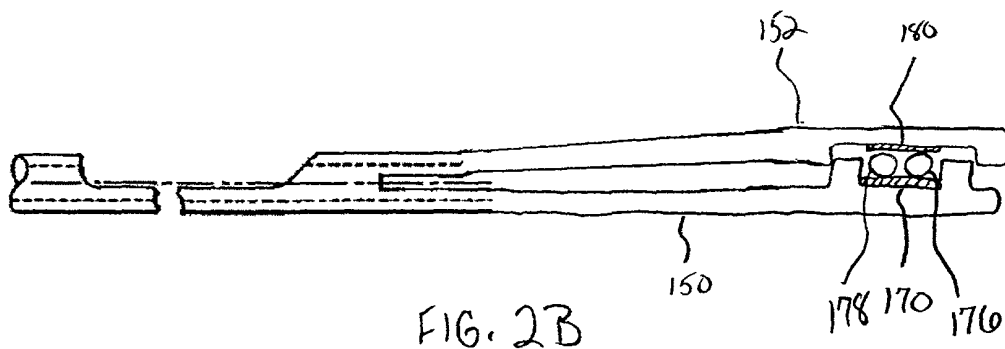


FIG. 2A







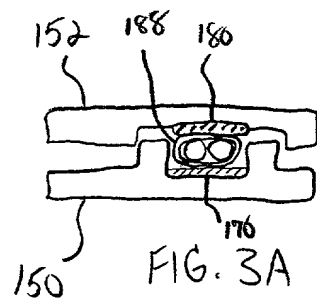


FIG. 3 is a cross-sectional view of the device of FIG. 1, taken along line 3-3 of FIG. 1, showing the device in a closed position. The device includes a housing 150, a top flange 152, a bottom flange 186, and a central component 180. The central component 180 includes two circular features 178 and 176. The device is shown in a closed position, with the central component 180 seated within the housing 150.

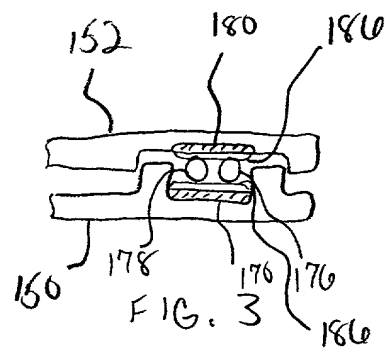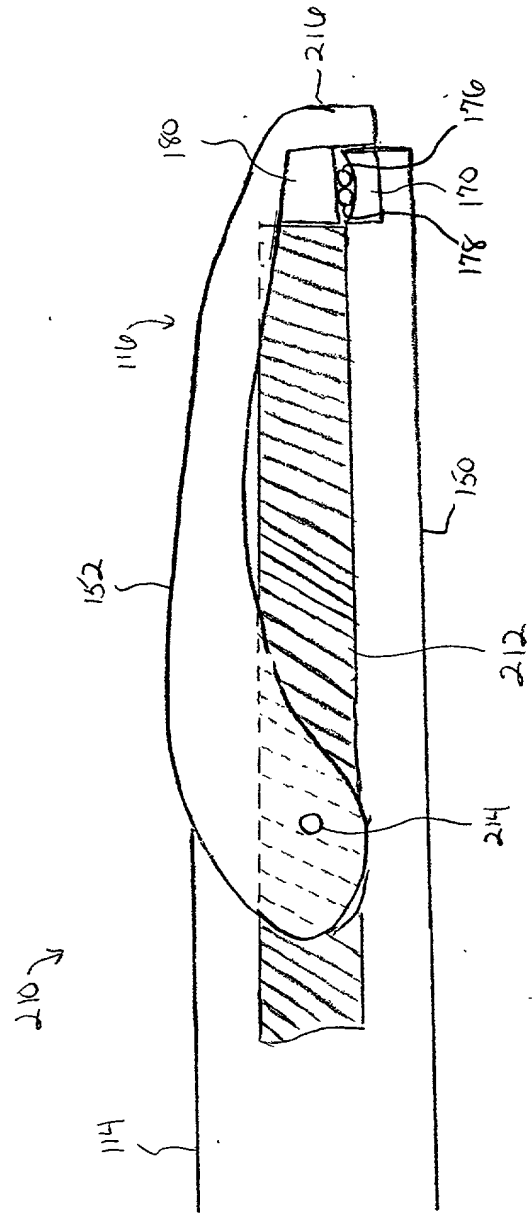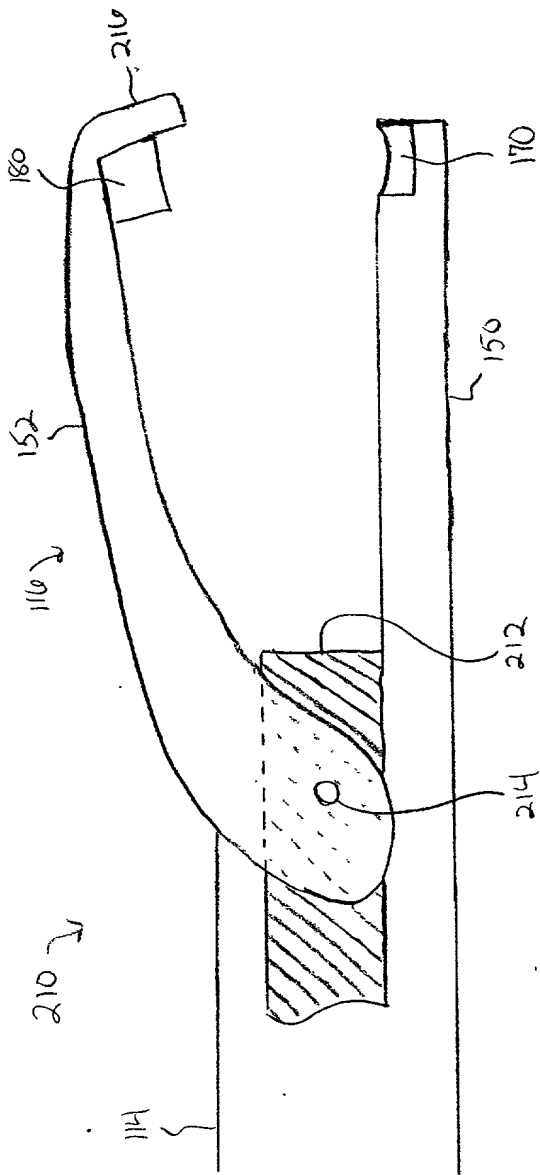

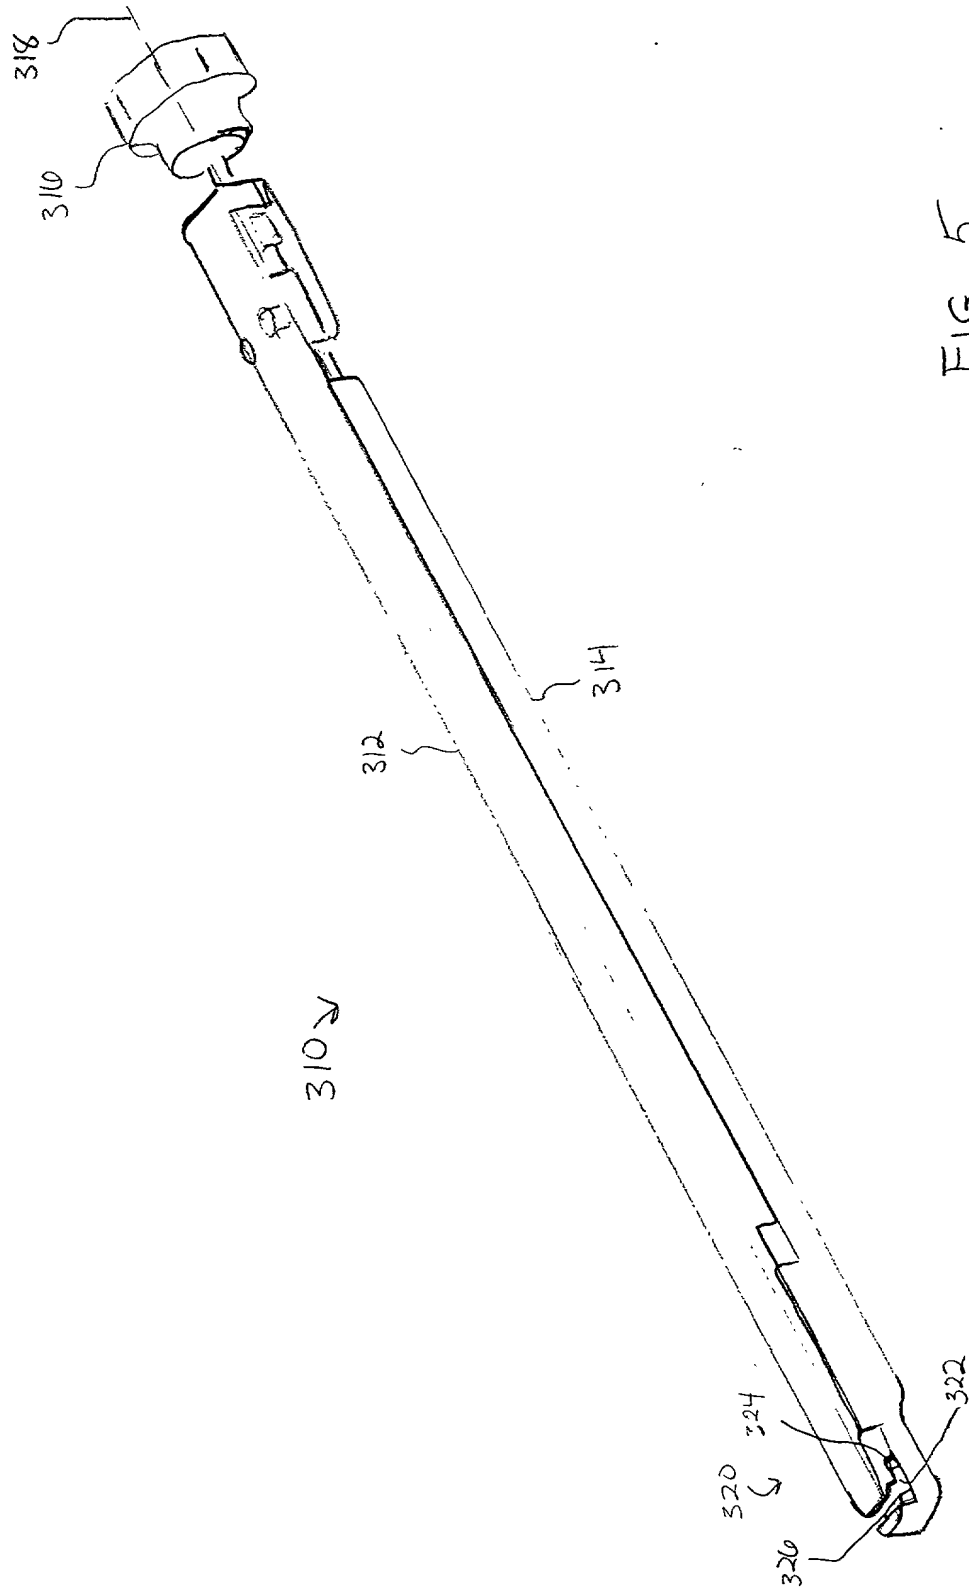

11.6.5